


單色光條規格 SLB SPEC.



SLB252-05

Input Voltage	12 Vac ~ 18Vac 12 Vdc ~ 22Vdc
Input Current	< 300 mA
Power Consumption	2.5 W
Total No. of LED Module	1
Illuminate Angle	± 80 degrees
Dimension (L x W x H)	60 x 40 x 20 (mm)

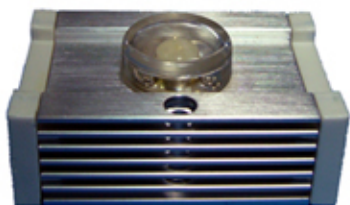

SLB252-15

Input Voltage	12 Vac ~ 18Vac 12 Vdc ~ 22Vdc
Input Current	< 600 mA
Power Consumption	6 W
Total No. of LED Module	3
Illuminate Angle	± 80 degrees
Dimension (L x W x H)	160 x 40 x 20 (mm)



SLB252-20

Input Voltage	12 Vac ~ 18Vac 12 Vdc ~ 22Vdc
Input Current	< 1000 mA
Power Consumption	8 W
Total No. of LED Module	4
Illuminate Angle	± 80 degrees
Dimension (L x W x H)	210 x 40 x 20 (mm)





SLB252-30


Input Voltage	12 Vac ~ 18Vac 12 Vdc ~ 22Vdc
Input Current	< 1200 mA
Power Consumption	12 W
Total No. of LED Module	6
Illuminate Angle	± 80 degrees
Dimension (L x W x H)	310 x 40 x 20 (mm)

功能選項 OPTIONS

2 different function options are available to apply with SLB:

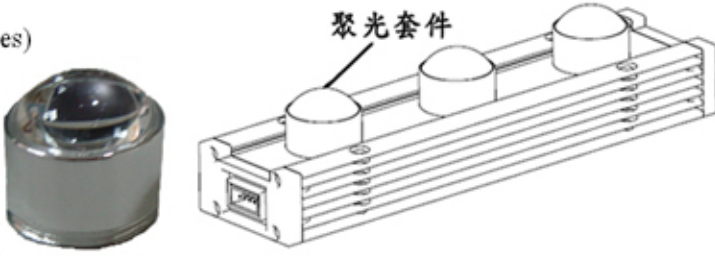Option	Descriptions & Diagram
-L	<p>聚光透鏡(Lens Option)</p> <p>◆ 照射角度: ± 26度 (Beam Angle: ± 26 degrees)</p>  <p>聚光套件</p>
-U	<p>防水封裝選項(Waterproofing Option)</p>  <p>防水套件</p> <p>防水套件</p>

尺寸圖 DIMENSION DIAGRAM

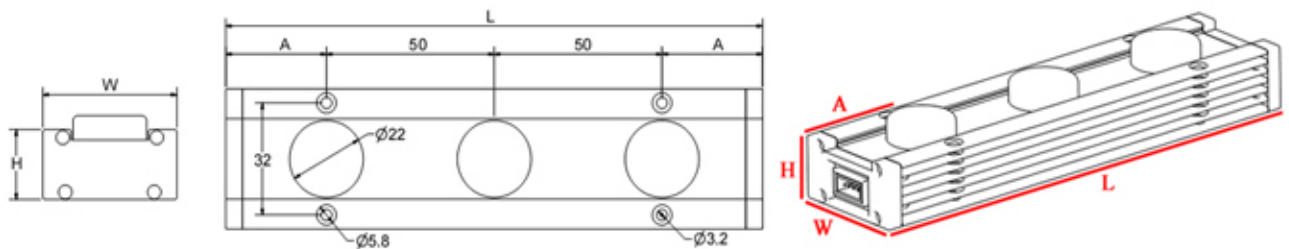

L: Length= 60/160/310 mm ; H: Height= 20 mm
 W: Width= 40 mm ; A: 30 mm / 80 mm

顏色規格 COLOR TABLE

No.	Item	Bin Code	Color Temperature / Dominant Wavelength	Lumen Flux (Typical)	Color
1	Cool White	ColW	5400 ~ 6600 K	80 \pm 10 lm	
2	Incandescent White	IcdW	4200 ~ 4900 K	80 \pm 10 lm	
3	Warm White	WarW	2700 ~ 3100 K	65 \pm 10lm	
4	Red	1000	625 nm	29 \pm 4 lm	
5	Green	2000	525 ~ 535 nm	36 \pm 5 lm	
6	Blue	3000	460 ~ 465 nm	48 \pm 1 lm	
7	Amber	4000	590 nm	23 \pm 4 lm	